

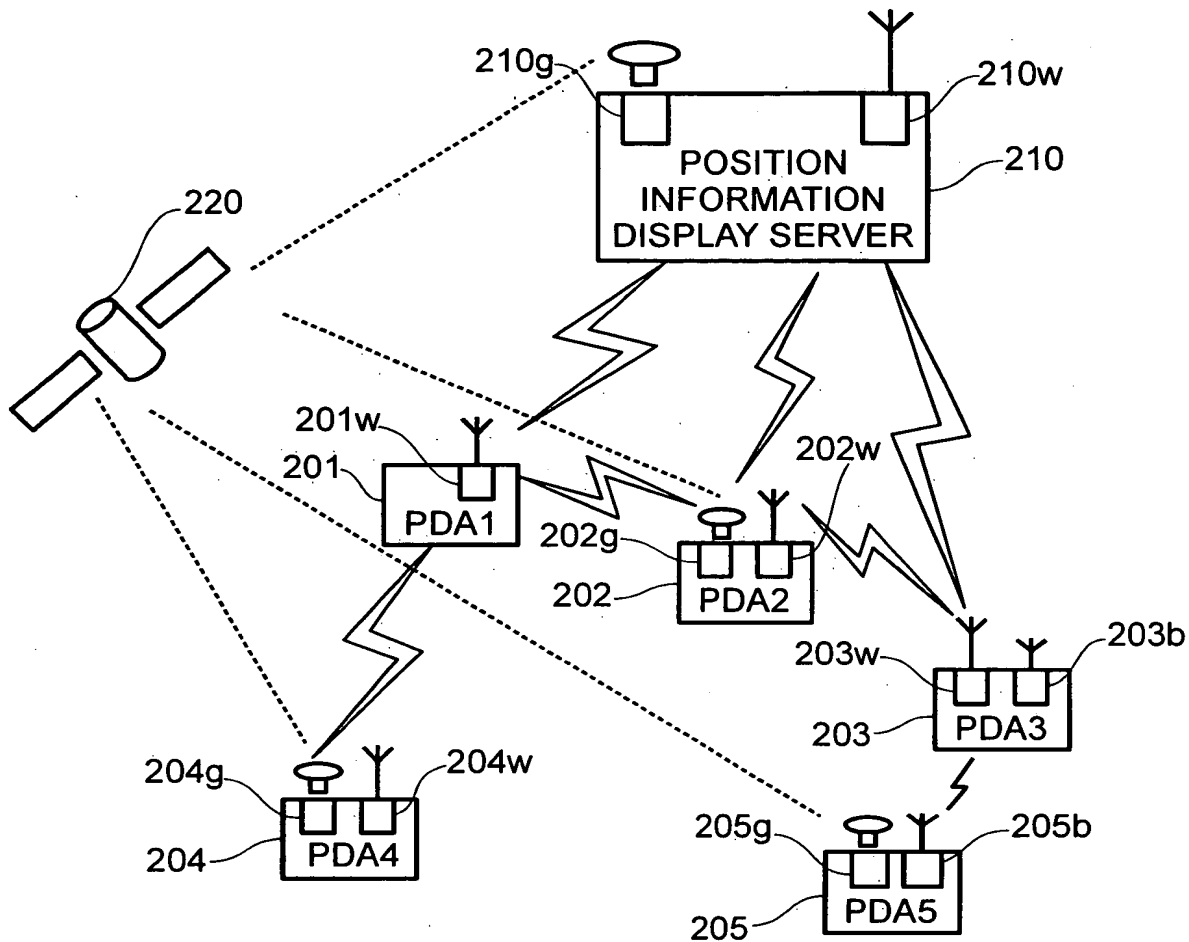
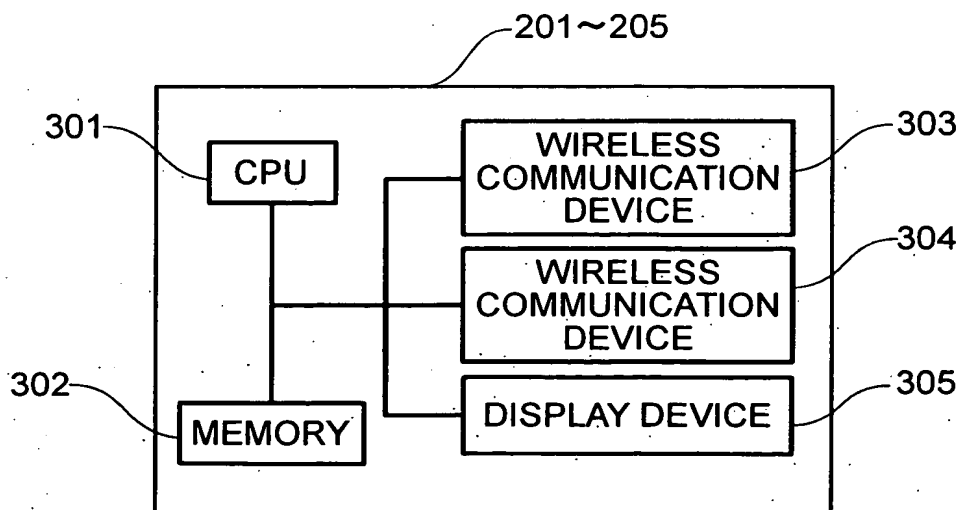
FIG.1**FIG.2**

FIG.3

401 NODE IDENTIFIERS	402 GATEWAYS	403 METRICS	404 INTERFACES	400
POSITION INFORMATION DISPLAY SERVER ...	—	1	wlan0	410
PDA2	—	1	wlan0	420
PDA3	PDA2	2	wlan0	430
PDA4	—	1	wlan0	440
PDA5	PDA2	3	wlan0	450

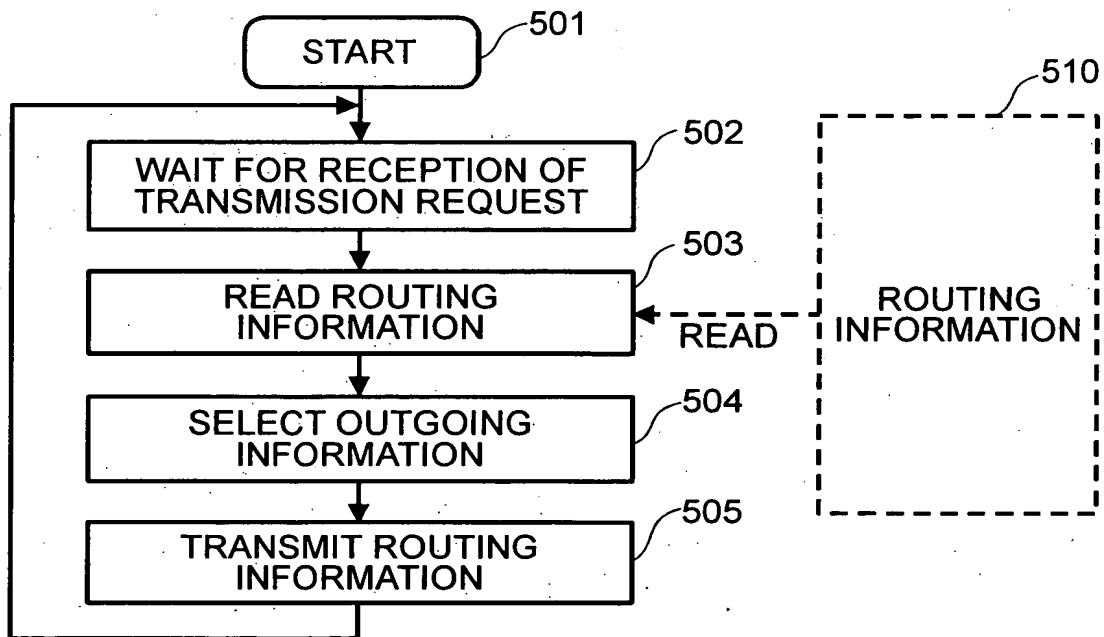
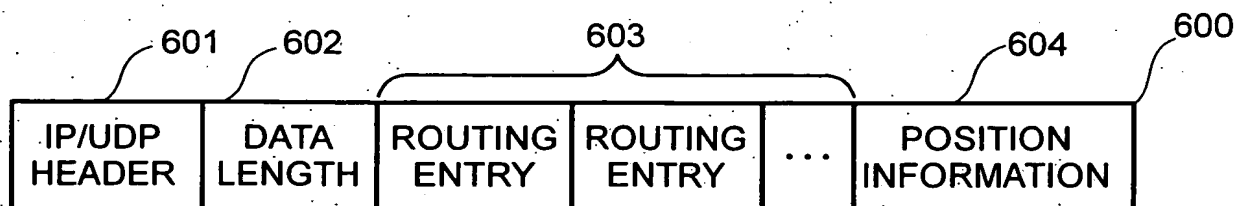
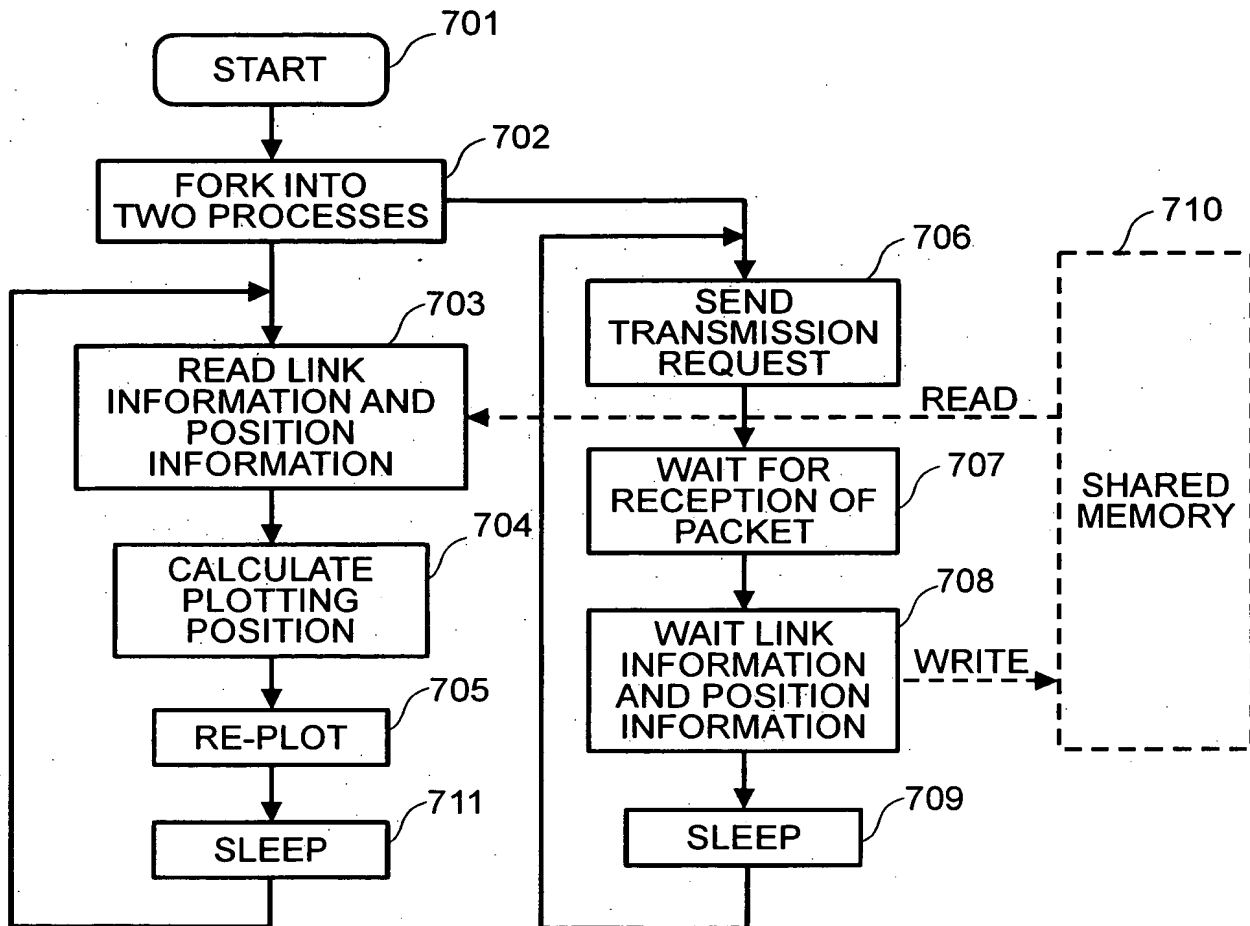
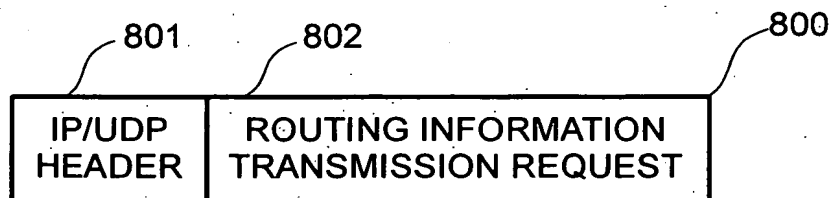
FIG.4**FIG.5**

FIG.6**FIG.7**

Applicant: Tatsuaki OSAFUNE, et al.

Title: Method for Managing Position Information About Nodes ...

Attorney Docket No. 16869P-108200US

Sheet 4 of 5

FIG.8

901 NODE IDENTIFIERS	902 POSITION INFORMATION	900
POSITION INFORMATION DISPLAY SERVER ...	X, Y	910
PDA1	—	920
PDA2	X2, Y2	930
PDA3	—	940
PDA4	X4, Y4	950
PDA5	X5, Y5	960

FIG.9

1001 LINK INFORMATION	1002 INTERFACES	1000
PDA1→PDA2	wlan0	1010
PDA1→PDA4	wlan0	1020
PDA1→POSITION INFORMATION DISPLAY SERVER ...	wlan0	1030
:	:	
:	:	

FIG.10

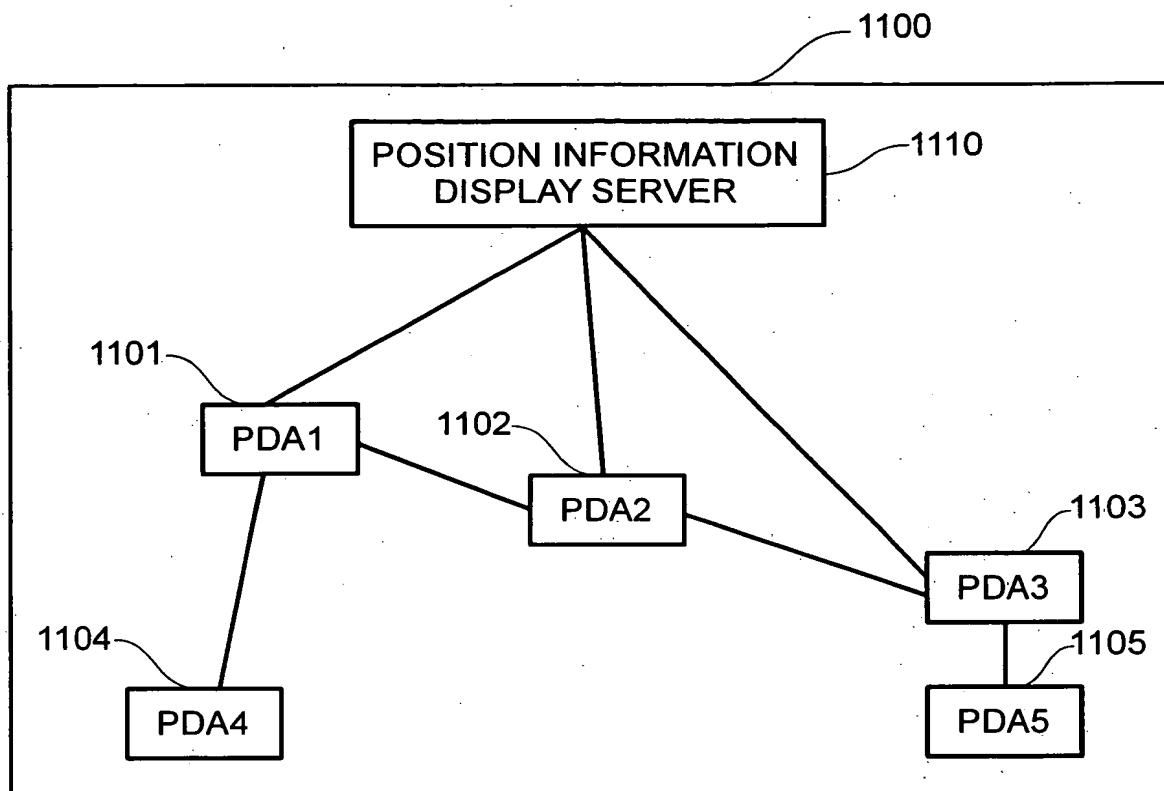


FIG.11

